


# Data Sheet

# **R-Series V RH5 EtherCAT®**

Magnetostrictive Linear Position Sensors

- Minimum resolution of 0.5 μm with down to 100 μs cycle time
- Position, velocity and acceleration measurements for up to 30 magnets
- Field adjustments and diagnostics using the new TempoLink<sup>®</sup> smart assistant

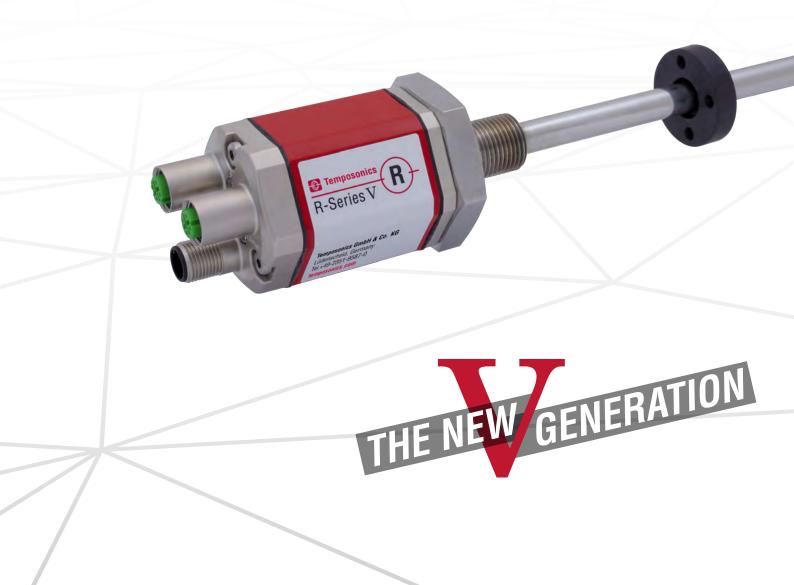

# **MEASURING TECHNOLOGY**

The absolute, linear position sensors provided by Temposonics rely on the company's proprietary magnetostrictive technology, which can determine position with a high level of precision and robustness. Each Temposonics position sensor consists of a ferromagnetic waveguide, a position magnet, a strain pulse converter and supporting electronics. The magnet, connected to the object in motion in the application, generates a magnetic field at its location on the waveguide. A short current pulse is applied to the waveguide. This creates a momentary radial magnetic field and torsional strain on the waveguide. The momentary interaction of the magnetic fields releases a torsional strain pulse that propagates the length of the waveguide. When the ultrasonic wave reaches the end of the waveguide it is converted into an electrical signal. Since the speed of the ultrasonic wave in the waveguide is precisely known, the time required to receive the return signal can be converted into a linear position measurement with both high accuracy and repeatability.

## **R-SERIES V EtherCAT®**

Temposonics® R-Series V brings very powerful sensor performance to meet the many demands of your application. The R-Series V is the long term solution for harsh environments that have high levels of shock and vibration. The sensor supports the EtherCAT® specifications including distributed clock. The mechanism of distributed clocks enables a synchronized communication with a minimum cycle time as fast as 100  $\mu$ s. For time-critical applications R-Series V with extrapolation allows synchronized controller communication for any stroke length of the sensor. In addition to position and velocity, the acceleration for up to 30 magnets can also be reported. Temposonics® R-Series V sensors are available with internal linearization which offers improved linearity for overall higher accuracy of the position measurement values. In addition to the measured position value via the EtherCAT<sup>®</sup> protocol further data about the current sensor status, such like the total distance travelled, the internal temperature and the total operating hours, can be utilized for diagnostic purposes.

With many outstanding features the R-Series V sensors are fit for a very broad range of applications.

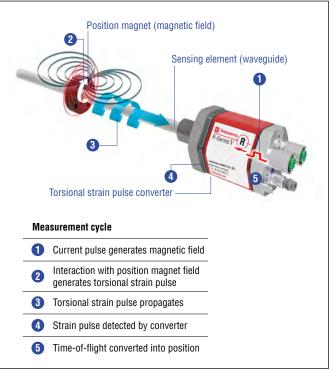


Fig. 1: Time-of-flight based magnetostrictive position sensing principle

# TempoLink YOUR SMART ASSISTANT

The TempoLink smart assistant is an accessory for the R-Series V family of sensors that supports setup and diagnostics. Depending on the sensor protocol it enables the adjustment of parameters like measurement direction, resolution and filter settings. For diagnostics and analysis of operational data the R-Series V sensors continuously track values such as total distance traveled by the positon magnet, internal temperature of the sensor and the quality of the position signal. This additional information can be read out via TempoLink smart assistant even while the sensor remains operational in the application.

TempoLink smart assistant is connected to the sensor via the power connection, which now adds bidirectional communication for setup and diagnostics. The TempoLink smart assistant is operated using a graphical user-interface that will be displayed on your smartphone, tablet, laptop or PC. Just connect your Wi-Fi-enabled device to TempoLink Wi-Fi access point and go to the website URL for the user-interface.



Fig. 2: R-Series V sensor with TempoLink Smart Assistant

# **TECHNICAL DATA**

Output						
Interface	EtherCAT <sup>®</sup> Ethernet C	ontrol Automation	Technology			
Data protocol	EtherCAT® 100 Base-	Tx, Fast Ethernet				
Data transmission rate	100 MBit/s max.					
Measured value	Simultaneous position	n, velocity and acc	eleration for up to 3	30 magnets		
Measurement parameters			·			
Resolution: Position	0.51000 µm (selec	table)				
Native cycle time	Stroke length	≤ 50 mm	≤ 715 mm	≤ 2000 mm	≤ 4675 mm	≤ 7620 mm
	Cycle time	250 µs	500 µs	1000 µs	2000 µs	4000 µs
Extrapolation cycle time	Number of magnets	≤ 10 magnets	1130 magnets 250 μs	-		
Linearity deviation <sup>1</sup>	Cycle time Stroke length	100 µs ≤ 500 mm	> 500 mm			
Emounty doviation	Linearity deviation	≤ ±50 μm	< 0.01 % F.S.	-		
	Optional internal linea		1	he first magnet for	r multi-position m	neasurement)
	Stroke length	25300 mm	300600 mm	6001200 mm	_	
	typical	±15 μm	±20 μm	±25 μm	_	
Repeatability	maximum < ±0.001 % F.S. (mini	±25 μm	±30 μm	±50 μm		
Hysteresis	$< 4 \ \mu m \ typical$	innunn ±2.5 µnn)				
Temperature coefficient	< 15 ppm/K typical					
Operating conditions						
Operating temperature	–40…+85 °C (–40	195 °E\				
Humidity	90 % relative humidit	,				
•		•	I			
Ingress protection Shock test	IP67 (connectors correctly fitted)					
Vibration test	150 g/11 ms, IEC standard 60068-2-27 30 g/102000 Hz, IEC 60068-2-6 (excluding resonant frequencies)/					
	RH5-J: 15 g / 102000 Hz, IEC standard 60068-2-6 (excluding resonant frequencies)					
EMC test	Electromagnetic emis	sion according to	EN 61000-6-3	0	. ,	
	Electromagnetic imm			d is used with	· c	
Operating pressure	The sensor meets the	•				11 602 noi)
	350 bar (5,076 psi)/700 bar (10,153 psi) peak (at 10 × 1 min) for sensor rod/RH5-J: 800 bar (11,603 psi) Any					
Magnet movement velocity Design/Material	Any					
Sensor electronics housing	Aluminum (painted),	zinc die cast				
Sensor flange	Stainless steel 1.4305					
Sensor rod	Stainless steel 1.4300	( )	I)/RH5-1: Stainles	c ctool 1 /301 (AIG	\$1.304)	
Stroke length	257620 mm (13				51 504)	
Mechanical mounting	257020 mm (15	00 111.)/11110-0. 20.		12 m.)		
Mounting position	Any					
Mounting instruction	Please consult the technical drawings on page 4					
Electrical connection		innoar arawings of	n <u>page 4</u>			
Connection type	2 × M12 female conn	ectors (5 pin) 1 ×	M8 male connecto	r (4 pin) or		
	2 × M12 female connectors (5 pin), 1 × M8 male connector (4 pin) or 2 × M12 female connectors (5 pin), 1 × M12 male connector (4 pin)					
Operating voltage	1230 VDC ±20 % (9.636 VDC)					
Power consumption	Less than 4 W typical					
Dielectric strength	500 VDC (DC ground to machine ground)					
Polarity protection	Up to –36 VDC					
Overvoltage protection	Up to 36 VDC					

1/ With position magnet # 251 416-2

# **TECHNICAL DRAWING**

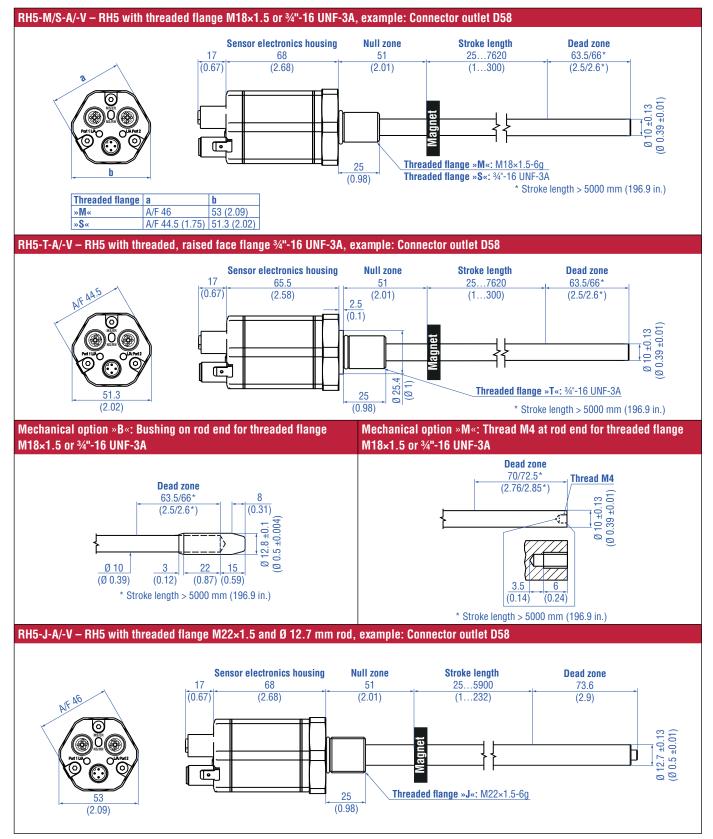


Fig. 3: Temposonics® RH5 with ring magnet

# **CONNECTOR WIRING**


D56		
Port 1 – Signal		
M12 female connector (D-coded)	Pin	Function
	1	Tx (+)
	2	Rx (+)
(4) (5) (2)	3	Tx (-)
3	4	Rx (-)
View on sensor	5	Not connected
Port 2 – Signal		
M12 female connector (D-coded)	Pin	Function
	1	Tx (+)
3	2	Rx (+)
	3	Tx (-)
	4	Rx (-)
View on sensor	5	Not connected
Power supply		
M8 male connector	Pin	Function
	1	+1230 VDC (±20 %)
(0 <sup>6</sup> )	2	Not connected
00	3	DC Ground (0 V)
View on sensor	4	Not connected

D58		
Port 1 – Signal		
M12 female connector (D-coded)	Pin	Function
	1	Tx (+)
	2	Rx (+)
(4) (5) (2)	3	Tx (-)
3	4	Rx (–)
View on sensor	5	Not connected
Port 2 – Signal		
M12 female connector (D-coded)	Pin	Function
$\frown$	1	Tx (+)
3	2	Rx (+)
(2)(5)(4)	3	Tx (-)
	4	Rx (–)
View on sensor	5	Not connected
Power supply		
M12 male connector (A-coded)	Pin	Function
	1	+1230 VDC (±20 %)
(คัด)	2	Not connected
V ø Ž	3	DC Ground (0 V)
View on sensor	4	Not connected

Fig. 5: Connector wiring D58

# FREQUENTLY ORDERED ACCESSORIES – Additional options available in our Accessories Guide 🗍 551444

#### **Position magnets**

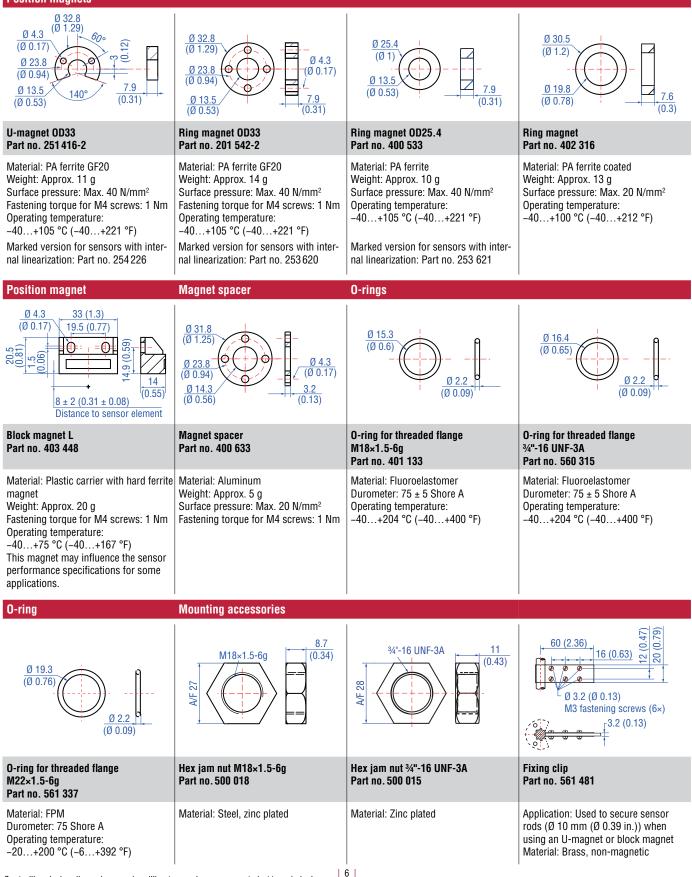

Controlling design dimensions are in millimeters and measurements in ( ) are in inches

Cable connectors*			
52 (2.05) (2.05) (2.05)	$\begin{array}{c} \hline \\ \hline $	53 (2.09) 0 2 0 0 0 0	
Signal connector M12 D-coded male (4 pin), straight Part no. 370 523	Signal connector M12 end cap Part no. 370 537	Power connector M12 A-coded female (5 pin), straight Part no. 370 677	Power connector M8 female (4 pin), straight Part no. 370 504
Material: Zinc nickel-plated Termination: Insulation-displacement Cable Ø: 5.57.2 mm (0.20.28 in.) Wire: 24 AWG – 22 AWG Operating temperature: -25+85 °C (-13+185 °F) Ingress protection: IP65/IP67 (correctly fitted) Fastening torque: 0.6 Nm	Female connectors M12 should be covered by this protective cap Material: Brass nickel-plated Ingress protection: IP67 (correctly fitted) Fastening torque: 0.390.49 Nm	Material: GD-Zn, Ni Termination: Screw Contact insert: CuZn Cable Ø: 48 mm (0.160.31 in.) Wire: 1.5 mm <sup>2</sup> Operating temperature: -30+85 °C (-22+185 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.6 Nm	Material: CuZn nickel plated Termination: Solder Cable Ø: 3.55 mm (0.140.28 in.) Wire: 0.25 mm <sup>2</sup> Operating temperature: -40+85 °C (-40+185 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.5 Nm
Programming kit	Cables		
TempoLink <sup>®</sup> kit for Temposonics <sup>®</sup> R-Series V Part no. TL-1-0-EM08 (D56) Part no. TL-1-0-EM12 (D58)	PUR signal cable Part no. 530 125	Signal cable with M12 D-coded male connector (4 pin), straight – M12 D-coded, male connector (4 pin), straight Part no. 530 064	Signal cable with M12 D-coded male connector (4 pin), straight – RJ45 male connector, straight Part no. 530 065
<ul> <li>Connect wirelessly via Wi-Fi enabled device or via USB with the diagnostic tool</li> <li>Simple connectivity to the sensor via 24 VDC power line (permissible cable length: 30 m)</li> <li>User friendly interface for mobile devices and desktop computers</li> <li>See product brief "TempoLink smart assistant" (document part no.: 551976) for further information</li> </ul>	Material: PUR jacket; green Features: Cat 5, highly flexible, halogen free, energy chain capable, mostly oil & flame restistant Cable Ø: 6.5 mm (0.26 in.) Cross section: 2 × 2 × 0.35 mm <sup>2</sup> (22 AWG) Operating temperature: -20+60 °C (-4+140 °F)	Material: PUR jacket; green Features: Cat 5e Cable length: 5 m (16.4 ft) Cable Ø: 6.5 mm (0.26 in.) Ingress protection: IP65/IP67/IP68 (correctly fitted) Operating temperature: -30+70 °C (-22+158 °F)	Material: PUR jacket; green Features: Cat 5e Cable length: 5 m (16.4 ft) Cable Ø: 6.5 mm (0.26 in.) Ingress protection M12 connector: IP67 (correctly fitted) Ingress protection RJ45 connector: IP20 (correctly fitted) Operating temperature: -30+70 °C (-22+158 °F)

\*/ Follow the manufacturer's mounting instructions

Controlling design dimensions are in millimeters and measurements in ( ) are in inches


 $\textbf{Temposonics}^{\circledast}$  R-Series  $\mathbf V$  RH5 EtherCAT  $^{\circledast}$  Data Sheet



Cables

PVC power cable Part no. 530 108	Power cable with M8 female connector (4 pin), straight – pigtail Part no. 530 066 (5 m (16.4 ft.)) Part no. 530 096 (10 m (32.8 ft.)) Part no. 530 093 (15 m (49.2 ft.))
Material: PVC jacket; gray Features: Shielded, flexible, mostly flame restistant Cable Ø: 4.9 mm (0.19 in.) Cross section: 3 × 0.34 mm <sup>2</sup> Bending radius: 10 × D Operating temperature: -30+80 °C (-22+176 °F)	Material: PUR jacket; gray Features: Shielded Cable Ø: 8 mm (0.3 in.) Operating temperature: -40+90 °C (-40+194 °F)

## **ORDER CODE**



# a Sensor model

R H 5 Rod

#### b Design

- **B** Base unit (only for replacement)
- J Threaded flange M22×1.5-6g (rod Ø 12.7 mm), stroke length: 25...5900 mm (1...232 in.)
- M Threaded flange M18×1.5-6g (standard)
- S Threaded flange <sup>3</sup>/<sub>4</sub>"-16 UNF-3A (standard)
- T Threaded flange <sup>3</sup>/<sub>4</sub>"-16 UNF-3A (with raised-face)

#### c Mechanical options

#### A Standard

- B Bushing on rod end (only for design »M«, »S« & »T«)
- M Thread M4 at rod end (only for design »M«, »S« & »T«)
- V Fluorelastomer seals for the sensor electronics housing

#### d Stroke length

## X X X X M 0025...7620 mm

	<b></b>	
Standard stroke length (mm)	Ordering steps	
25 500 mm	5 mm	
500 750 mm	10 mm	
7501000 mm	25 mm	
10002500 mm	50 mm	
25005000 mm	100 mm	
50007620 mm	250 mm	

# X X X X U 001.0...300.0 mm

Standard stroke length (in.)	Ordering steps	
1 20 in.	0.2 in.	
20 30 in.	0.4 in.	
30 40 in.	1.0 in.	
40100 in.	2.0 in.	
100200 in.	4.0 in.	
200300 in.	10.0 in.	
20 30 in. 30 40 in. 40100 in. 100200 in.	0.4 in. 1.0 in. 2.0 in. 4.0 in.	

Non-standard stroke lengths are available; must be encoded in 5 mm/0.1 in. increments.

D	D       5       8       2 × M12 female connectors (5 pin), 1 × M12 male connectors (4 pin)					
g	System					
1	Standard					
h	Output					

	Out			
U	1	0	1	EtherCAT <sup>®</sup> , position, velocity and acceleration (130 positions)
				(130 positions)
U	1	1	1	EtherCAT <sup>®</sup> , position, velocity and acceleration internal linearization (130 positions)

#### NOTICE

e Number of magnets

f Connection type

**X X** 01...30 Position(s) (1...30 magnet(s))

**D 5 6** 2 × M12 female connectors (5 pin),

# • Specify number of magnets for your sensing application and order separately.

- The number of magnets is limited by the stroke length. The minimum allowed distance between magnets (i.e. front face of one to the front face of the next one) is 75 mm (3 in.).
- Use magnets of the same type for multi-position measurement, e.g. 2 × U-magnet (part no. 251416-2).
- If the option for internal linearization (U111) in h "Output" is chosen, select a suitable magnet.

# DELIVERY

# RH5-B:

- Base unit (without flange/rod assembly)
- 3 socket screws M4

RH5-J/-M/-S/-T:

- Sensor
- O-ring

Accessories have to be ordered separately.

Manuals, Software & 3D Models available at: www.temposonics.com

### **GLOSSARY**

#### D

#### **Distributed Clock**

EtherCAT<sup>®</sup> uses a logical network of Distributed Clocks to synchronize the time on all local bus devices on the network. The EtherCAT<sup>®</sup> master selects the first slave device as a Reference Clock, and then maintains a precise mapping of frame delays for all other slave devices in order to adjust their time to match the system time.

# E

#### ESI

The properties and functions of an EtherCAT<sup>®</sup> device are described in an ESI fi le (EtherCAT<sup>®</sup> Slave Information). The XML-based ESI fi le contains all relevant data that are important for the implementation of the device in the controller as well as for data exchange during operation. The ESI file of the R-Series V EtherCAT<sup>®</sup> is available on the homepage www.temposonics.com.

#### **EtherCAT**®

EtherCAT<sup>®</sup> (**Ethernet** for **C**ontrol **A**utomation **T**echnology) is an Industrial Ethernet interface and is managed by the EtherCAT<sup>®</sup> Technology Group (ETG). The R-Series V EtherCAT<sup>®</sup> and its corresponding ESI file are certitified by the ETG.

#### Extrapolation

The native measurement cycle time of a sensor increases with the stroke length. With extrapolation, the sensor is able to report data faster than the native cycle time, independent of the stroke length of the sensor.

### 

#### **Internal Linearization**

The internal linearization offers an improved linearity for an overall higher accuracy of the position measurement. The internal linearization is set for the sensor during production.

## Μ

#### **Multi-position measurement**

During the measurement cycle, the positions of every magnet on the sensor are simultaneously reported. The velocity and acceleration are continuously calculated based on these changing position values as the magnets are moved.



UNITED STATES Temposonics, LLC Americas & APAC Region	3001 Sheldon Drive Cary, N.C. 27513 Phone: +1 919 677-0100 E-mail: info.us@temposonics.com		<b>Document Part Number:</b> 552055 Revision A (EN) 04/2020
Temposonics GmbH & Co. KG	Auf dem Schüffel 9 58513 Lüdenscheid Phone: +49 2351 9587-0 E-mail: info.de@temposonics.com	CA	EtherCAT
	Phone: +39 030 988 3819 E-mail: info.it@temposonics.com		Conformance tested
	Phone: +33 6 14 060 728 E-mail: info.fr@temposonics.com		
	Phone: +44 79 21 83 05 86 E-mail: info.uk@temposonics.com		
	Phone: + 46 70 29 91 281 E-mail: info.sca@temposonics.com		
	Phone: +86 21 2415 1000 / 2415 1001 E-mail: info.cn@temposonics.com		
JAPAN Branch Office	Phone: +81 3 6416 1063 E-mail: info.jp@temposonics.com		

# temposonics.com

© 2021 Temposonics, LLC – all rights reserved. Temposonics, LLC and Temposonics GmbH & Co. KG are subsidiaries of Amphenol Corporation. Except for any third party marks for which attribution is provided herein, the company names and product names used in this document may be the registered trademarks or unregistered trademarks of Temposonics, LLC or Temposonics GmbH & Co. KG. Detailed trademark ownership information is available at www.temposonics.com/trademarkownership.