

Data Sheet

G-Series V GP5 Analog Magnetostrictive Linear Position Sensors

- Versatile output ranges for current or voltage output
- LED for visualization of the sensor status
- Field adjustments and diagnostics using the TempoLink® smart assistant



MEASURING TECHNOLOGY

The absolute, linear position sensors provided by Tempsonics rely on the company's proprietary magnetostrictive technology, which can determine position with a high level of precision and robustness. Each Tempsonics® position sensor consists of a ferromagnetic waveguide, a position magnet, a strain pulse converter and supporting electronics. The magnet, connected to the object in motion in the application, generates a magnetic field at its location on the waveguide. A short current pulse is applied to the waveguide. This creates a momentary radial magnetic field and torsional strain on the waveguide. The momentary interaction of the magnetic fields releases a torsional strain pulse that propagates the length of the waveguide. When the ultrasonic wave reaches the beginning of the waveguide it is converted into an electrical signal. Since the speed of the ultrasonic wave in the waveguide is precisely known, the time required to receive the return signal can be converted into a linear position measurement with both high accuracy and repeatability.

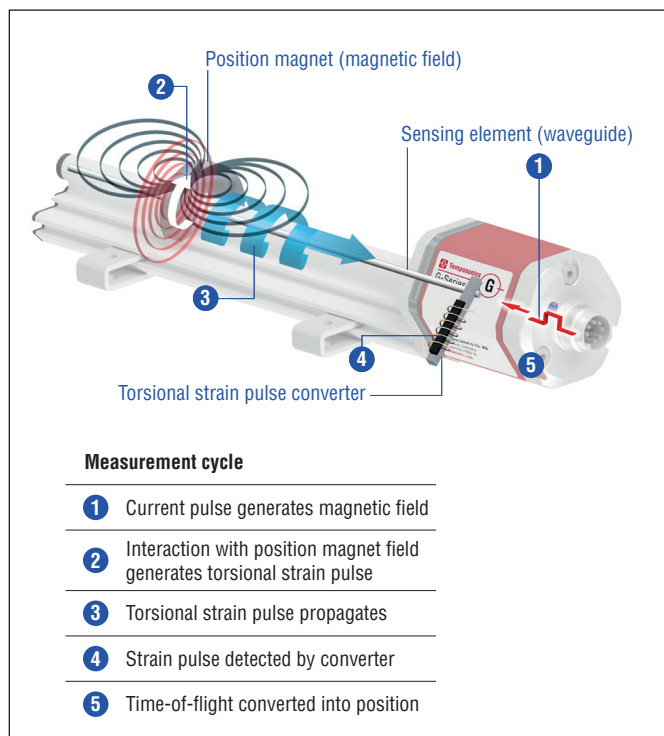


Fig. 1: Time-of-flight based magnetostrictive position sensing principle

G-SERIES V GP5 Analog

The Tempsonics® G-Series V brings balanced sensor performance to meet the many demands of your application. The main advantages of the profile version GP5 with Analog output (current/voltage) are:




Infinite resolution

Due to an analog measuring method there is no quantization of the position value, therefore the resolution is infinite.



LED for sensor status

The LED in the housing cover visualizes the sensor status. This allows you to see the current status of the sensor at a glance.



Versatile output ranges

You can configure the analog output of the sensor for different output ranges to suit your application.

All settings under control with the smart assistant for the G-Series V

The TempoLink® smart assistant supports you in setup and diagnostics of the G-Series V. Among other things, you can adjust the setting points of the sensor to your application on site or read out information about the current status of the sensor.

For more information of the assistant please see the data sheet:

- TempoLink® smart assistant
(Document part number: [552070](#))



TECHNICAL DATA

Output						
Analog	Voltage: 0...10 /10...0 VDC (min. controller load > 5 kΩ) Current: 4(0)...20/20...4(0) mA (min./max. load 0/500 Ω)					
Measured output variables	Position for one position magnet					
Measurement parameters						
Null/Span adjustment	100 % of electrical stroke					
Resolution	Infinite					
Update time	Stroke length	≤ 500 mm	≤ 1100 mm	≤ 3000 mm	≤ 6250 mm	≤ 6350 mm
	Update time	500 μs	1 ms	2 ms	4 ms	5 ms
Linearity deviation ¹	< ±0.02 % F.S. (minimum ±50 μm)					
Repeatability	< ±0.002% % F.S. (minimum ±5 μm)					
Hysteresis	< 4 μm typical					
Temperature coefficient	< 30 ppm/K typical					
Operating conditions						
Operating temperature	–40...+80 °C (–40...+176 °F)					
Humidity	90 % relative humidity, no condensation					
Ingress protection	IP67 (connectors correctly fitted)//IP68 (3 m/3 d) & IP69 for cable outlet					
Shock test	100 g/11 ms, IEC standard 60068-2-27					
Vibration test	20 g/10...2000 Hz, IEC standard 60068-2-6 (excluding resonant frequencies)					
EMC test	Electromagnetic emission according to EN 61000-6-3 Electromagnetic immunity according to EN 61000-6-2 The GP5 sensors fulfill the requirements of the EMC directives 2014/30/EU, UKSI 2016 No. 1091 and TR CU 020/2011					
Magnet movement velocity	Magnet slider: Max. 10 m/s; U-magnet: Any; block magnet: Any					
Design/Material						
Sensor electronics housing	Aluminum (painted), zinc die cast					
Sensor profile	Aluminum					
RoHS compliance	The used materials are compliant with the requirements of EU Directive 2011/65/EU and EU Regulation 2015/863 as well as UKSI 2022 No. 622 with amendments					
Stroke length	25...6350 mm (1...250 in.)					
Mechanical mounting						
Mounting position	Any					
Mounting instruction	Please consult the technical drawings on page 4					
Electrical connection						
Connection type	1 × M16 male connectors (6 pin)or cable outlet					
Operating voltage	+24 VDC (–15/+20 %); the GP5 sensors must be power supplied via an external Class 2 power source in accordance with the UL approval					
Power consumption	75 mA maximum					
Dielectric strength	500 VDC (DC ground to machine ground)					
Polarity protection	Up to –30 VDC					
Overvoltage protection	Up to 36 VDC					

TECHNICAL DRAWING

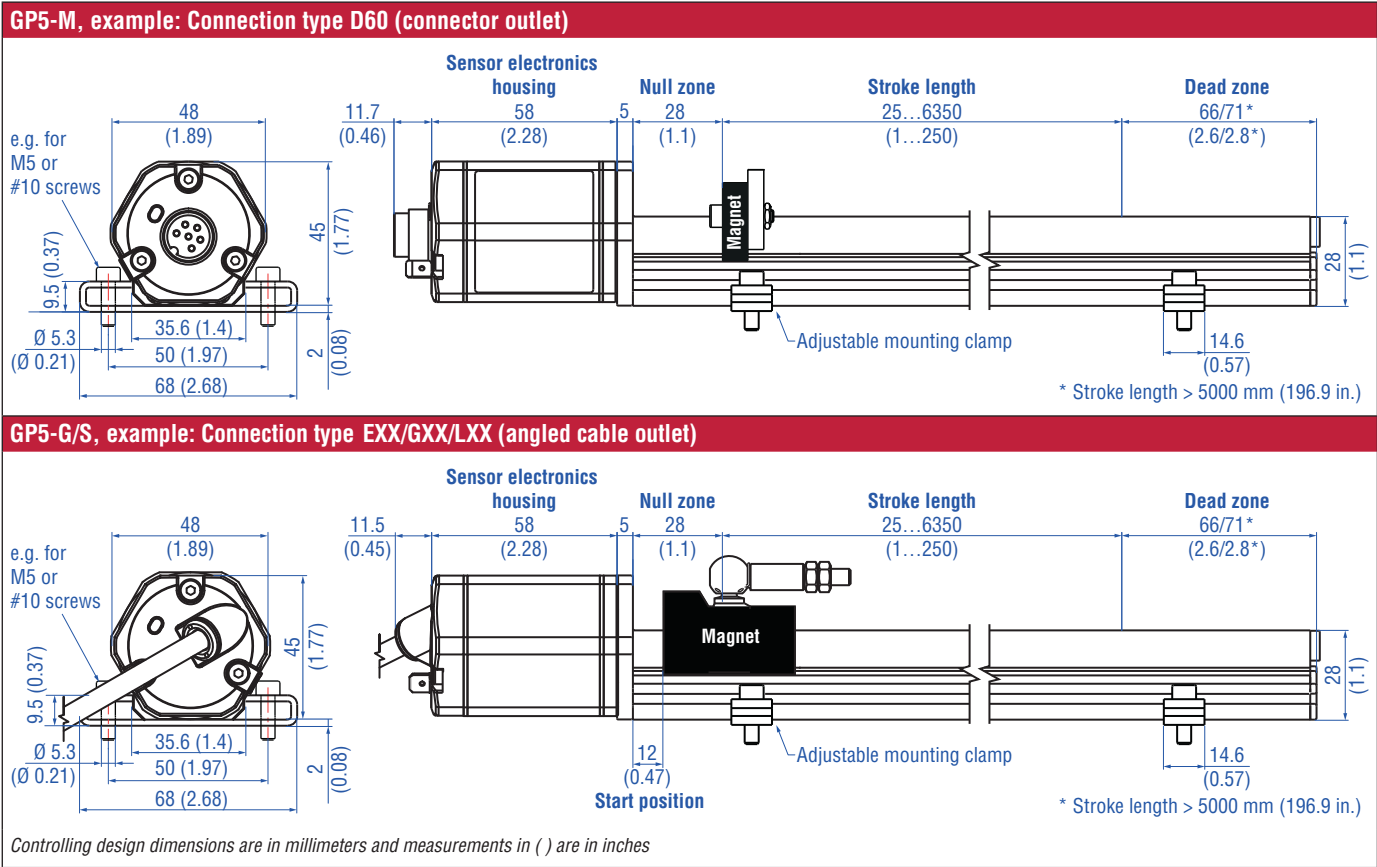


Fig. 2: Temposonics® GP5 with U-magnet/magnet slider

CONNECTOR WIRING


D60		
Signal + power supply		
M16 male connector	Pin	Function
 <p>View on sensor</p>	1	Position
	2	Signal Ground
	3	Do not connect
	4	Do not connect
	5	+24 VDC (–15/+20 %)
	6	DC Ground (0 V)

Fig. 3: Connector wiring D60


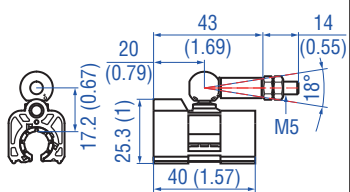
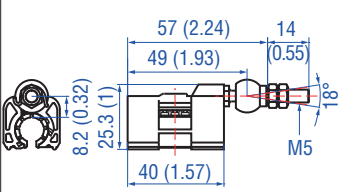
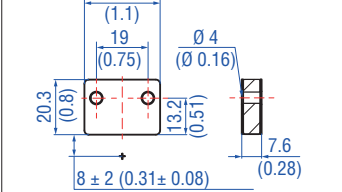
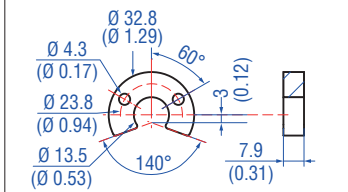
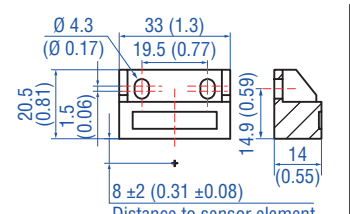
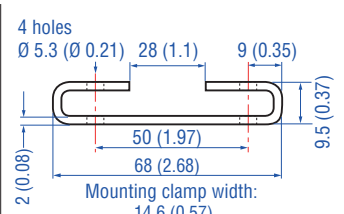
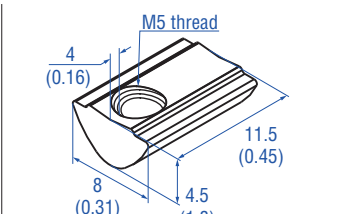
EXX/GXX/LXX		
Signal + power supply		
Cable	Color	Function
	GY	Position
	PK	Signal Ground
	YE	Do not connect
	GN	Do not connect
	BN	+24 VDC (–15/+20 %)
	WH	DC Ground (0 V)

Fig. 4: Connector wiring for cable outlet





FREQUENTLY ORDERED ACCESSORIES – Additional options available in our [Accessories Catalog](#) 551444

Position magnets			
			
Magnet slider S, joint at top Part no. 252 182	Magnet slider V, joint at front Part no. 252 184	Block magnet K Part no. 251 298-2	U-magnet OD33 Part no. 251 416-2
Material: GRP, magnet hard ferrite Weight: Approx. 35 g Operating temperature: –40...+85 °C (–40...+185 °F)	Material: GRP, magnet hard ferrite Weight: Approx. 35 g Operating temperature: –40...+85 °C (–40...+185 °F)	Material: XOLOX Neobond 50L Weight: Approx. 22 g Surface pressure: Max. 20 N/mm² Fastening torque for M4 screws: 1 Nm Operating temperature: –40...+105 °C (–40...+221 °F) This magnet may influence the sensor performance specifications for some applications.	Material: PA ferrite GF20 Weight: Approx. 11 g Surface pressure: Max. 40 N/mm² Fastening torque for M4 screws: 1 Nm Operating temperature: –40...+120 °C (–40...+248 °F)
Position magnets		Mounting accessories	
			
Block magnet L Part no. 403 448	Mounting clamp Part no. 400 802	T-nut Part no. 401 602	
Material: Plastic carrier with neodymium magnet Weight: Approx. 20 g Fastening torque for M4 screws: 1 Nm Operating temperature: –40...+75 °C (–40...+167 °F) This magnet may influence the sensor performance specifications for some applications.	Material: Stainless steel (AISI 304)	Fastening torque for M5 screw: 4.5 Nm	

Controlling design dimensions are in millimeters and measurements in () are in inches

Cable connectors*

Cables

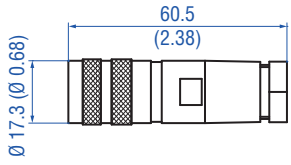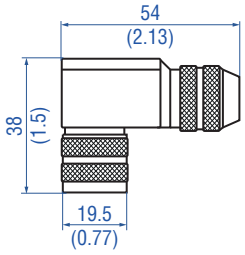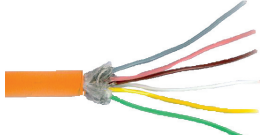			
M16 female connector (6 pin), straight Part no. 370 423	M16 female connector (6 pin), angled Part no. 370 460	PVC cable Part no. 530 032	PUR cable Part no. 530 052
<p>Material: Zinc nickel plated Termination: Solder Cable Ø: 6...8 mm (0.24...0.31 in.) Operating temperature: -40...+100 °C (-40...+212 °F) Ingress protection: IP65/IP67 (correctly fitted) Fastening torque: 0.6 Nm</p>	<p>Material: Zinc nickel plated Termination: Solder Cable Ø: 6...8 mm (0.24...0.31 in.) Wire: 0.75 mm² (20 AWG) Operating temperature: -40...+95 °C (-40...+203 °F) Ingress protection: IP67 (correctly fitted) Fastening torque: 0.6 Nm</p>	<p>Material: PVC jacket; gray Features: Twisted pair, shielded, flexible Cable Ø: 6 mm (0.23 in.) Cross section: 3 × 2 × 0.14 mm² Bending radius: 10 × D (fixed installation) Operating temperature: -40...+105 °C (-40...+221 °F)</p>	<p>Material: PUR jacket; orange Features: Twisted pair, shielded, highly flexible, halogen free, suitable for drag chains, mostly oil & flame resistant Cable Ø: 6.4 mm (0.25 in.) Cross section: 3 × 2 × 0.25 mm² Bending radius: 5 × D (fixed installation) Operating temperature: -20...+80 °C (-4...+176 °F)</p>

Cable



FEP cable Part no. 530 157

Material: FEP jacket; black
Features: Twisted pair, shielded
Cable Ø: 6.7 mm (0.26 in.)
Cross section: 3 × 2 × 0.14 mm²
Operating temperature: -40...+180 °C (-40...+356 °F)

*/ Follow the manufacturer's mounting instructions
Color of connectors and cable jacket may change. Color codes for the individual wires and technical properties remain unchanged.
Controlling design dimensions are in millimeters and measurements in () are in inches

ORDER CODE

1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18
G	P	5								0	1				1		
a			b	c					d		e			f	g	h	i

a	Sensor model
G P 5	Profile

b	Design
K	Block magnet K (part no. 251 298-2)
L	Block magnet L (part no. 403 448)
M	U-magnet OD33 (part no. 251 416-2)
O	No position magnet
S	Magnet slider joint at top (part no. 252 182)
V	Magnet slider joint at front (part no. 252 184)

c	Mechanical options
A	Standard
V	Fluorelastomer seals for the sensor electronics housing

d	Stroke length
X X X X M	0025...6350 mm
Standard stroke length (mm) Ordering steps	
25... 500 mm	25 mm
500...2500 mm	50 mm
2500...5000 mm	100 mm
5000...6350 mm	250 mm
X X X X U	001.0...250.0 in.
Standard stroke length (in.) Ordering steps	
1... 20 in.	1.0 in.
20...100 in.	2.0 in.
100...200 in.	4.0 in.
200...250 in.	10.0 in.
Non-standard stroke lengths are available; must be encoded in 5 mm/0.1 in. increments.	

e	Number of magnets
0 1	01 Position (1 magnet)

f	Connection type
Connector	
D 6 0	M16 male connector (6 pin)
Angled cable outlet	
E X X	XX m/ft. PVC cable (part no. 530 032) E01...E30 (1...30 m/3...99 ft.) See "Frequently ordered accessories" for cable specifications
G X X	XX m/ft. FEP cable (part no. 530 157) G01...G30 (1...30 m/3...99 ft.) See "Frequently ordered accessories" for cable specifications
L X X	XX m/ft. PUR cable (part no. 530 052) L01...L30 (1...30 m/3...99 ft.) See "Frequently ordered accessories" for cable specifications
Encode in meters if using metric stroke length. Encode in feet if using US customary stroke length.	

g	System
1	Standard

h	Output
A	Current
V	Voltage

i	Output range
0	0...10 VDC or 4...20 mA
1	10...0 VDC or 20...4 mA
2	0...20 mA
3	20...0 mA

DELIVERY



- Sensor
- Position magnet (not valid for GP5 with design »O«)
- 2 mounting clamps up to 1250 mm (50 in.) stroke length

Accessories have to be ordered separately.

Manuals, Software & 3D Models available at:
www.temposonics.com



Temposonics

AN AMPHENOL COMPANY

UNITED STATES
Temposonics, LLC
Americas & APAC Region
3001 Sheldon Drive
Cary, N.C. 27513
Phone: +1 919 677-0100
E-mail: info.us@temposonics.com

GERMANY
Temposonics
GmbH & Co. KG
EMEA Region & India
Auf dem Schüffel 9
58513 Lüdenscheid
Phone: +49 2351 9587-0
E-mail: info.de@temposonics.com

ITALY
Branch Office
Phone: +39 030 988 3819
E-mail: info.it@temposonics.com

FRANCE
Branch Office
Phone: +33 6 14 060 728
E-mail: info.fr@temposonics.com

UK
Branch Office
Phone: +44 79 21 83 05 86
E-mail: info.uk@temposonics.com

SCANDINAVIA
Branch Office
Phone: +46 70 29 91 281
E-mail: info.sca@temposonics.com

CHINA
Branch Office
Phone: +86 21 3405 7850
E-mail: info.cn@temposonics.com

JAPAN
Branch Office
Phone: +81 3 6416 1063
E-mail: info.jp@temposonics.com

Document Part Number:
552205 Revision A (EN) 07/2025



temposonics.com

© 2025 Temposonics, LLC – all rights reserved. Temposonics, LLC and Temposonics GmbH & Co. KG are subsidiaries of Amphenol Corporation. Except for any third party marks for which attribution is provided herein, the company names and product names used in this document may be the registered trademarks or unregistered trademarks of Temposonics, LLC or Temposonics GmbH & Co. KG. Detailed trademark ownership information is available at www.temposonics.com/trademarkownership.