


## Data Sheet

# MH-Series MH4 MH200 Analog/Digital


## Magnetostruktive Lineare Positionssensoren

- Stroke range up to 5000 mm
- Linearity  $\leq 0.04$  % F.S. / Resolution typ. 0.5 mm
- Capable for support tube installation

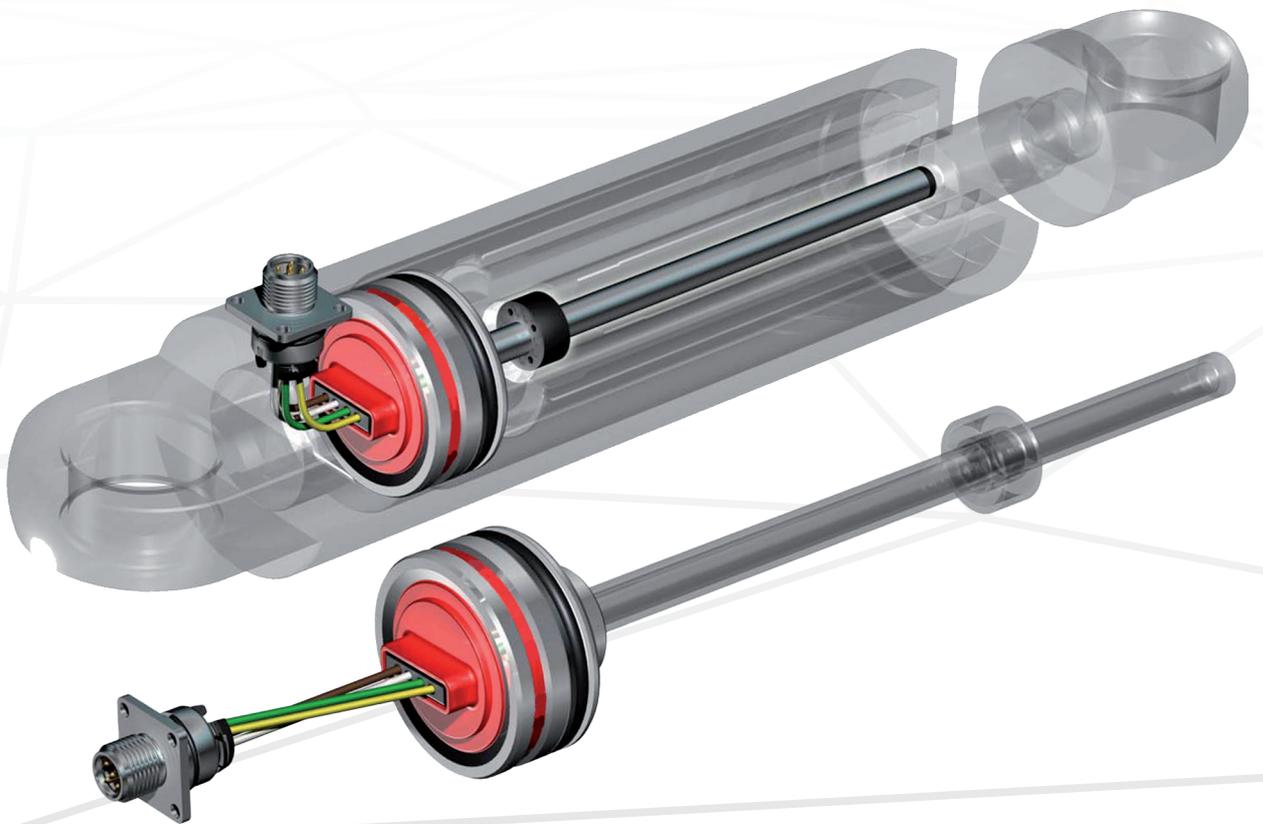

## 1. Product description and technology

Temposonics® sensors can be used in versatile mobile machines without any restriction and replace contact-based linear sensors like potentiometers. Highly dynamic systems are controlled safely by means of Temposonics® sensors, thus enhancing the productivity, availability and quality of the working process of the machine. Insensitive to vibration, shocks, dust and weathering influence and electro-magnetic disturbances. Temposonics® MH Series sensors are successfully used in front axle and articulated frame steering cylinders, hydraulic jacks and in steering systems for hydraulic units on agricultural and construction machinery.

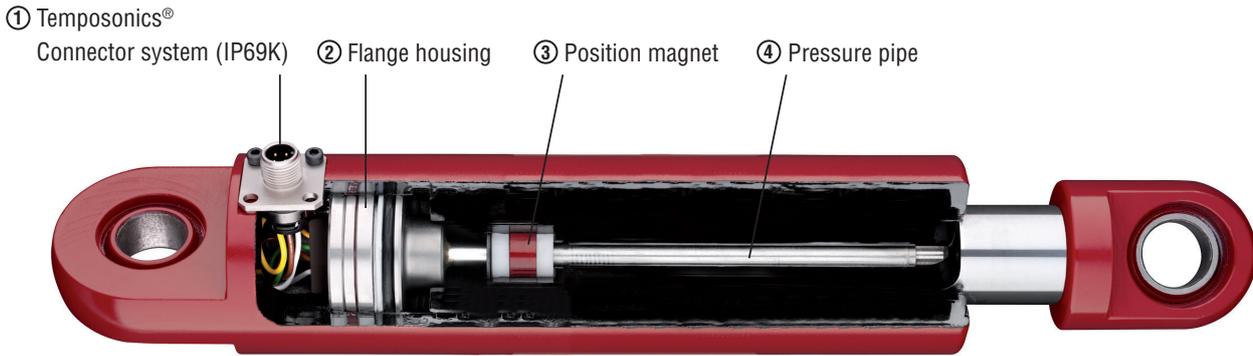

### Simple Mechanics

The extremely robust sensor consists of the following main parts:


- ① The innovative connector system which is easy to install in a few seconds, any soldering or crimping needless, dust-and waterproof up to IP69K.
- ② The flange housing with built-in electronics and signal converter.
- ③ The position magnet as only moving part, which is assembled into the piston bottom. This permanent magnet travels wear-free and contactless along the pressure pipe and measures the actual position.
- ④ The pressure pipe placed within the drilled piston rod contains the protected magnetostrictive sensing element.

- Due to small dimensions MH sensors require only little space
- Suitable for operating pressures up to 320 bar
- Unaffected by surrounding media such as ageing or foaming oil
- Insensitive to shock and vibration
- Designed for all current supply voltages (12/24 VDC)
- Temposonics® sensors offer all common used output signals:
  - Analog: VDC / mA
  - Bus protocols: CANopen, SAE J1939

### Magnetostriction

Temposonics® linear sensors are based on the magnetostrictive technology. By measuring the actual position with a non-contact position magnet the sensor operates 100% wear-free. The absolute operating principle enables reliable readings without any reference point or recalibration. A mechanical strain pulse is triggered by the travelling position magnet. The runtime of this ultrasonic wave is measured precisely and compiled into standard electronic output signals.


### Measurement principle

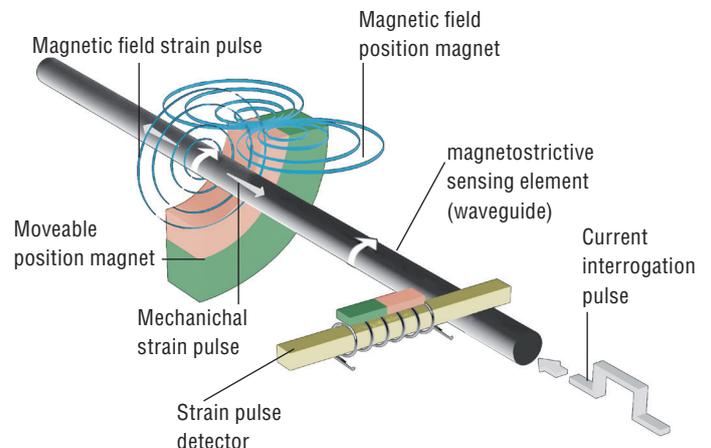


## 2. Temposonics® connector system M12

### Temposonics presents the innovative connector system for Temposonics® MH-Series

The Temposonics® Connector System meets the highest protection requirements important for a harsh environment in mobile hydraulic applications. Protection type IP69K performs water and dust proof. In addition it is even resistive against high pressure water cleaning.

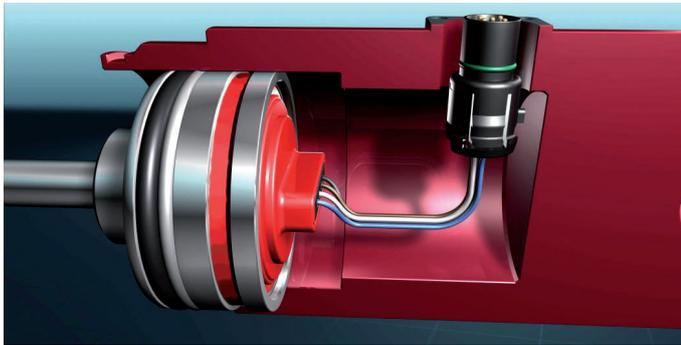

- 1 The MH sensor is delivered by Temposonics together with the new connector system: The connector insert carrier is already connected to the sensor conductors, i.e. no soldering, any colour or connection mistake.

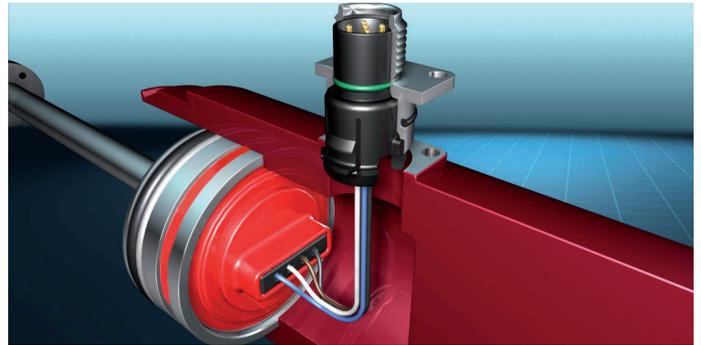

- 2 The connector insert is taken out of the cylinder through a bore hole. The flange can easily be clicked in position from outside.




- 3 Four standard screws must be tightened to mount the connector system on the cylinder. In case of using angled type connectors the connector insert can be rotated inside the flange in 45° steps.



- 4 With a corresponding mating plug the connector system fulfills an IP rating of IP69K.

- Absolutely easy and safe installation.
- No brazing or crimping of connecting leads is required.

### 3. Dimensions

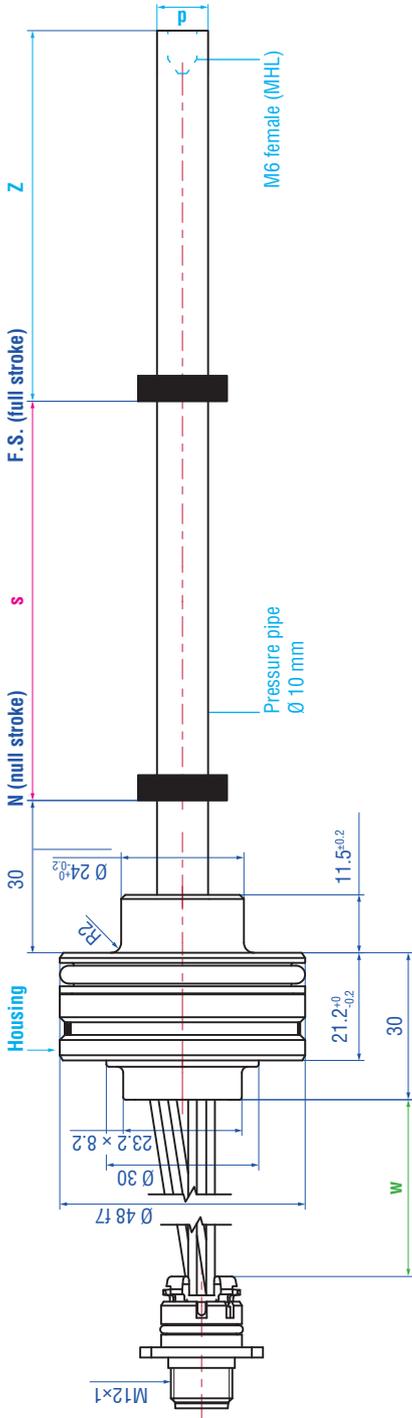

**Model no.** MH **C** - **1 5 0 0** M - N **1 2 G** - 3 - **V02** **A01** **4** **7F**

**L** **F**


e.g.: s = 1500 mm  
e.g.: w = 120 mm

**Mechanical configurations**

<b>Form factor</b>	<b>C</b> Z = 63.5 mm (s < 5000 mm), Ø 10 mm pressure pipe
	<b>L</b> Z = 69.5 mm (s < 5000 mm), Ø 10 mm pressure pipe
<b>Stroke range</b>	<b>s</b> 2520...5000 mm (in 20 mm steps)
<b>Wire length</b>	<b>w</b> 60...240 mm (in 20 mm steps)

**Electrical configurations**

<b>MH Analog</b>	<b>G</b> 1 = VDC 3 = GND 4 = Sig 2 = n.c.
	<b>H</b> 1 = VDC 2 = Sig 3 = GND 4 = n.c.
<b>MH Digital</b>	<b>F</b> 2 = VDC 3 = GND 4 = CAN HI 5 = CAN LO 1 = n.c.
<b>MH Analog</b>	<b>A01</b> 4...20 mA
	<b>V02</b> 0.5...9.5 VDC
<b>MH Digital</b>	<b>C01</b> CANopen
	<b>J01</b> SAE J1939
<b>Baudrate</b>	<b>3</b> 250 kbit/sec
	<b>4</b> 125 kbit/sec
<b>Node ID</b>	<b>7F</b> hex
	<b>FD</b> hex

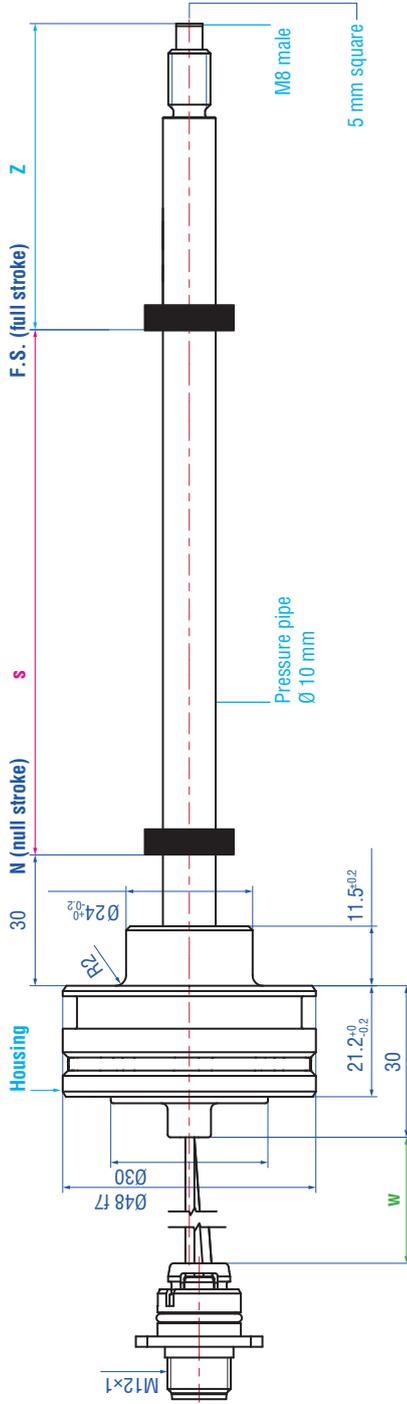

**Mechanical configurations**

<b>Form factor</b>	<b>Q</b> Z = 85.5 mm (s < 5000 mm), Ø 10 mm pressure pipe
<b>Stroke range</b>	<b>s</b> 2520...5000 mm (in 20 mm steps)
<b>Wire length</b>	<b>w</b> 60...240 mm (in 20 mm steps)

**Model no.** MH **Q** - **1 5 0 0** **M - N** **1 2 G** - **3** - **V02** **A01**  
**H** **F** **F**  
**4** **3** **FD**  
**7F** **3** **FD**  
 e.g.: s = 1500 mm  
 e.g.: w = 120 mm

**Electrical configurations**

<b>MH Analog</b>	<b>G</b> 1 = VDC 3 = GND 2 = Sig 4 = n.c.
	<b>H</b> 1 = VDC 3 = GND 2 = Sig 4 = n.c.
<b>MH Digital</b>	<b>F</b> 2 = VDC 3 = GND 4 = CAN HI 5 = CAN LO 1 = n.c.
	<b>A01</b> 4...20 mA
<b>MH Analog</b>	<b>V02</b> 0.5...9.5 VDC
<b>MH Digital</b>	<b>C01</b> CANopen
	<b>J01</b> SAE J1939
<b>Baudrate</b>	<b>3</b> 250 kbit/sec
	<b>4</b> 125 kbit/sec
<b>Node ID</b>	<b>7F</b> hex
	<b>FD</b> hex



## 4. In Cylinder assembly

### Mechanical installation

The robust Temposonics® model MH sensor is designed for direct stroke measurement in hydraulic cylinders.

The Temposonics® MH sensor can be installed from the head side or the rod side of the cylinder depending on the cylinder design.

### Example

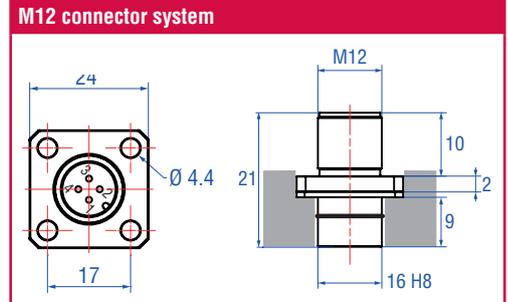
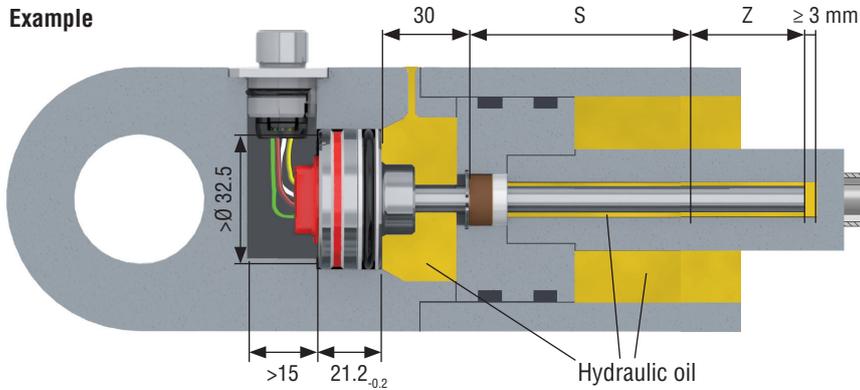


### Sensor installation


The method of installation is entirely dependent on the cylinder design.

While the most common method of installation is from the rod side of the cylinder, an installation from the head side of the cylinder is also possible.

In both installation methods, the hermetic sealing of the cylinder is given by an O-ring with additional back up ring.



Flange housing with O-ring and back-up ring




### Example:

e.g. retaining with set screw  
DIN 913 M5 × 10 (with flat point!)  
max. torque 0.5 Nm

**Please pay attention:**

- The position magnet shall not touch the pressure pipe.
- Do not exceed operating pressure.
- Piston rod drilling:  
Depth:  $S + Z + 3$  mm  
Diameter:  $\text{Ø } 13$  mm minimum

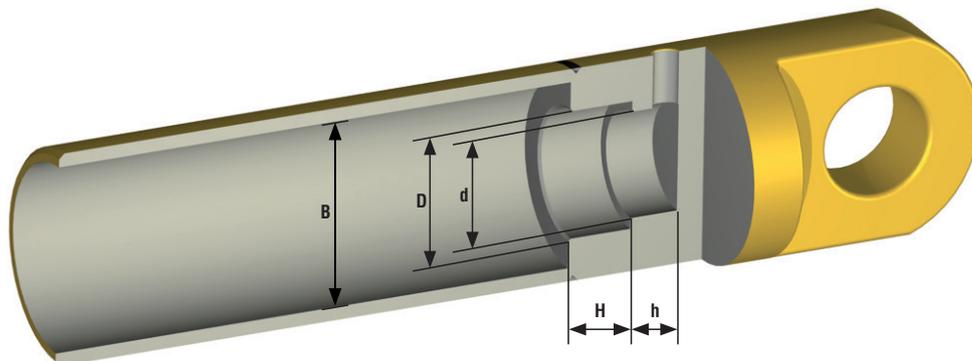

Type	B Ø Cylinder	D Ø min.	H Depth	d Ø min.	h Depth
MH	≥ 52	48H8 screwed 48G7 welded	≥ 21.2	≥ 32.5 ≤ 40	≥ 15






Please pay attention to installation manual!

All dimensions in mm



## 4.1 Position magnets

**Position magnets (please order separately) for installation without support tube**

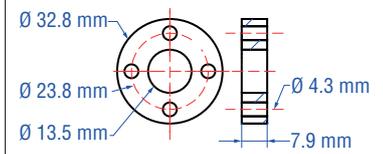

Part no.	401 032	400 533	201 542-2
<b>Dimensions</b>			
OD <sub>M</sub>	17.4 mm	25.4 mm	32.8 mm
ID <sub>M</sub>	13.5 mm	13.5 mm	13.5 mm
Height	7.9 mm	7.9 mm	7.9 mm
<b>Characteristics</b>			
Material	PA neobond	PA ferrite	PA ferrite
Weight	ca. 5 g	ca. 10 g	ca. 14 g
Operating temperature	-40...+100 °C	-40...+100 °C	-40...+100 °C
Surface pressure*	max. 20 N/mm <sup>2</sup>	max. 40 N/mm <sup>2</sup>	max. 40 N/mm <sup>2</sup>
Fastening torque for M4 screws	-	-	max. 1 Nm

**Position magnets (please order separately) for installation with support tube**




Part no.	402 316	403 974
<b>Dimensions</b>		
OD <sub>M</sub>	30.5 mm	32.0 mm
ID <sub>M</sub>	19.8 mm	26.0 mm
Height	7.6 mm	12.0 mm
<b>Support tube</b>		
	18 × 1.5 mm	22 × 2 mm
<b>Characteristics</b>		
Material	PA ferrite coated	NdFeB
Weight	ca. 13 g	ca. 20 g
Operating temperature	-40...+100 °C	-40...+100 °C
Surface pressure*	20 N/mm <sup>2</sup>	20 N/mm <sup>2</sup>

\*max. mechanical burden, e.g. by circlip, lock washers etc.

## 4.2 Position magnet (M) and magnet assembly with spacer (S) in piston

### 4.2.1 Installation without support tube

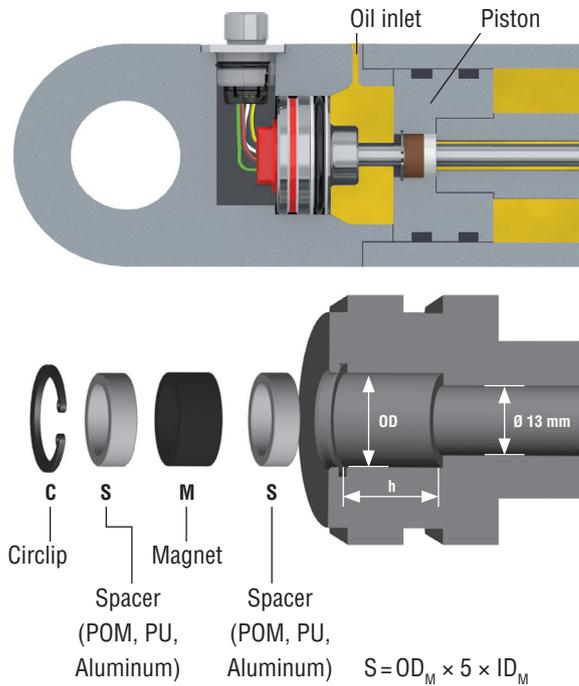


Magnet (M)	401 032	400 533	201 542-2
OD	17.5 mm <sup>+0.2</sup>	25.5 mm <sup>+0.2</sup>	32.9 mm <sup>+0.2</sup>
h - Depth	13.5 mm	13.5 mm	13.5 mm

#### NOTICE

Spacers, washers, pretension parts etc. are not part of Temposonics shipment!

### 4.2.2 Installation with support tube

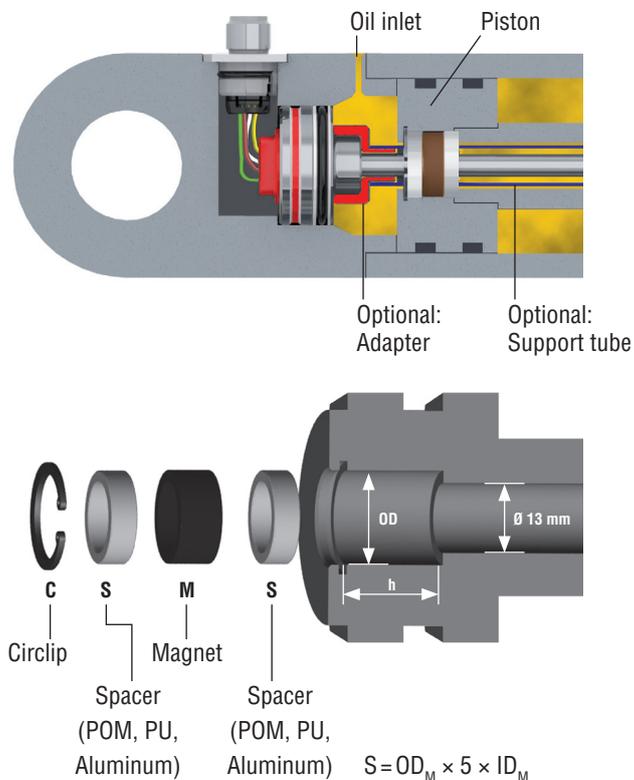

Stroke range	Support tube	Piston rod drilling	Magnet
2640...3240 mm	Ø 18 × 1.5 mm	Ø 22	402 316
3260...5000 mm	Ø 22 × 2.0 mm	Ø 26	403 974

Magnet (M)	402 316	403 974
OD	30.6 mm <sup>+0.2</sup>	32.1 mm <sup>+0.2</sup>
h - Depth	13.5 mm	13.5 mm

#### NOTICE

Spacers, washers, pretension parts etc. are not part of Temposonics shipment!

#### NOTICE

For correct sensor installation and technical support please contact our application team



Please pay attention to installation manual!

### 4.3 Support tube assembly for MH model MHQ



Please note that the support tube assembly and the adapter accessories is a proposal by Temposonics. For further design information please consult Temposonics application engineering who will consult and clarify as required.


#### Please pay attention to:

- Support tube adapters must enable oilflow to get rid of air when cylinder gets oil filled
- Support tubes material is stainless steel 1.4301 (AISI 304) or 1.4305 (AISI 303).  
If machining is conducted on stainless steel support tubes please make sure it does not induce magnetic properties to the material.
- Nut M8 to tighten with max. 4 Nm. Use glue to fix the nut
- Use a wrench 5 mm to hold the pressure pipe end when tighten the nut M8
- No torsional stress to apply on the pressure pipe
- Adapters material: stainless steel, aluminum, PA or POM
- Head and tail adapter: OD tolerances are applied in conjunction with the tolerances valid for the wall thickness of selected support tube





Adapters, support tube, locknuts, etc. are not part of Temposonics shipment.

#### 4.3.1 Support tube assembly

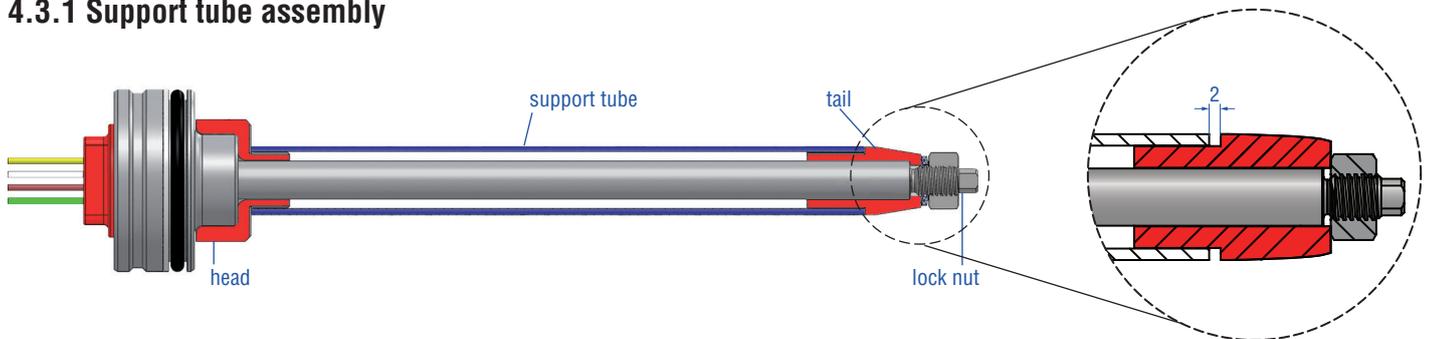


#### 4.3.3 Assembly adapters


Head



Tail (for 18 × 1.5 mm support tube)



Tail (for 22 × 2 mm support tube)



#### NOTICE

For correct sensor installation and technical support please contact our application team

#### 4.4 Operating conditions and load limits considering a sensor installation with support tube.

##### 4.4.1 Vibration Ratings on Machines

Vibration ratings for machines are shown in the EU directive 2002/44/EC.

Real effective accelerations and forces within the hydraulic cylinder may exceed this level.

For the cylinder installation requiring a support tube an applied load collective has been defined in order to approve the design for the resonance frequency range.

Considering the results out of the load collective the operating grade for pressure and vibration loads has been conducted. The calculation follows the guideline published from Mechanical Engineering Research Community FKM Germany.

For pressurized hydraulic cylinders the operating grade is given wide below 100%.

##### Diagramm (operating grade in %)

100 % = Burst Level

50 % = 5.3 g Peak Acceleration

25 % = 1.5 g Effective Load Cycle, 2.15 g Peak Acceleration

0 % = without Load





##### 4.4.2 Load Cycle Test with Support Tube 22x2mm

Reference Cylinder- horizontal Installation.


Resonance Endurance Test  $2.5 \times 10^6$  Load Cycles with Sinus Wave Form.

To perform and approve the mechanical load within the resonance range (94 Hz to 95 Hz). The test was passed without any permanent damages observed after this test.

##### Resonance Endurance Test

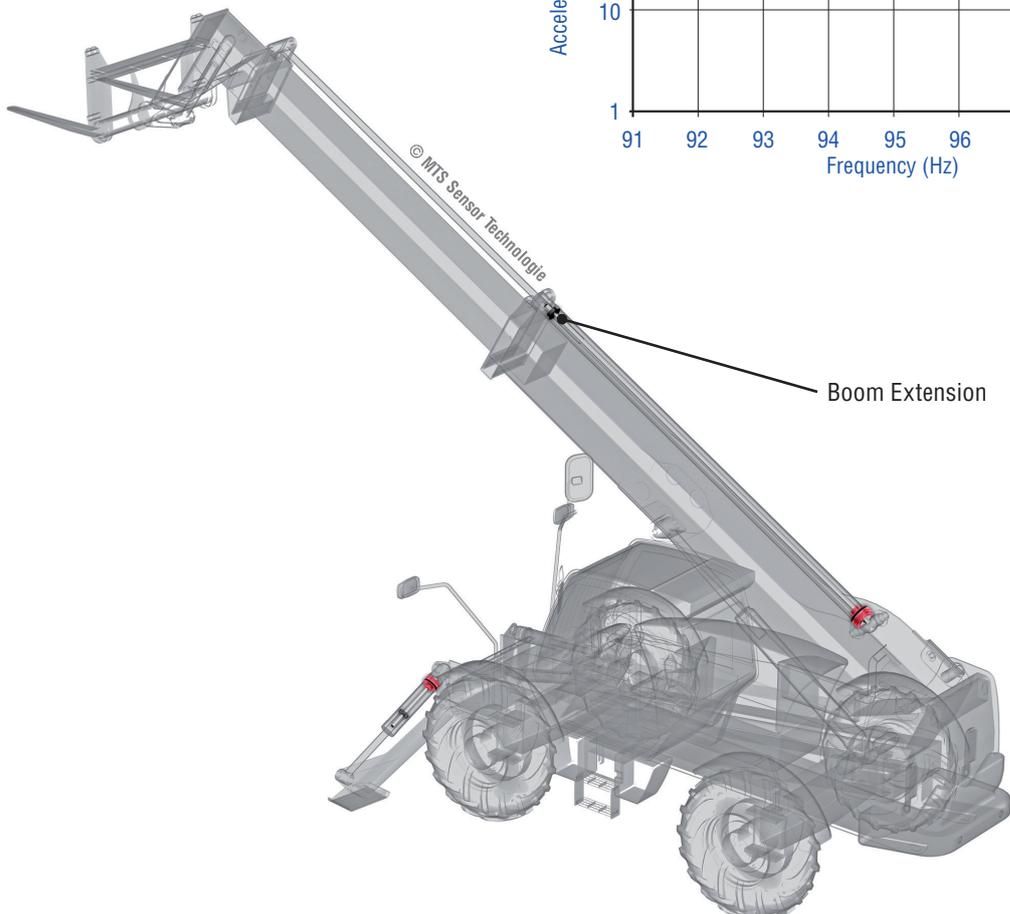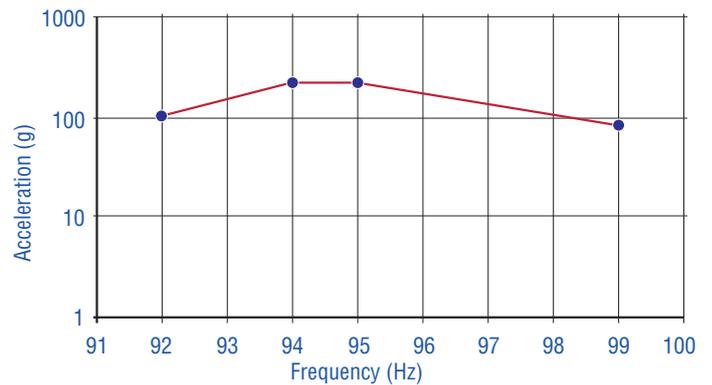


## 5. Electrical installation

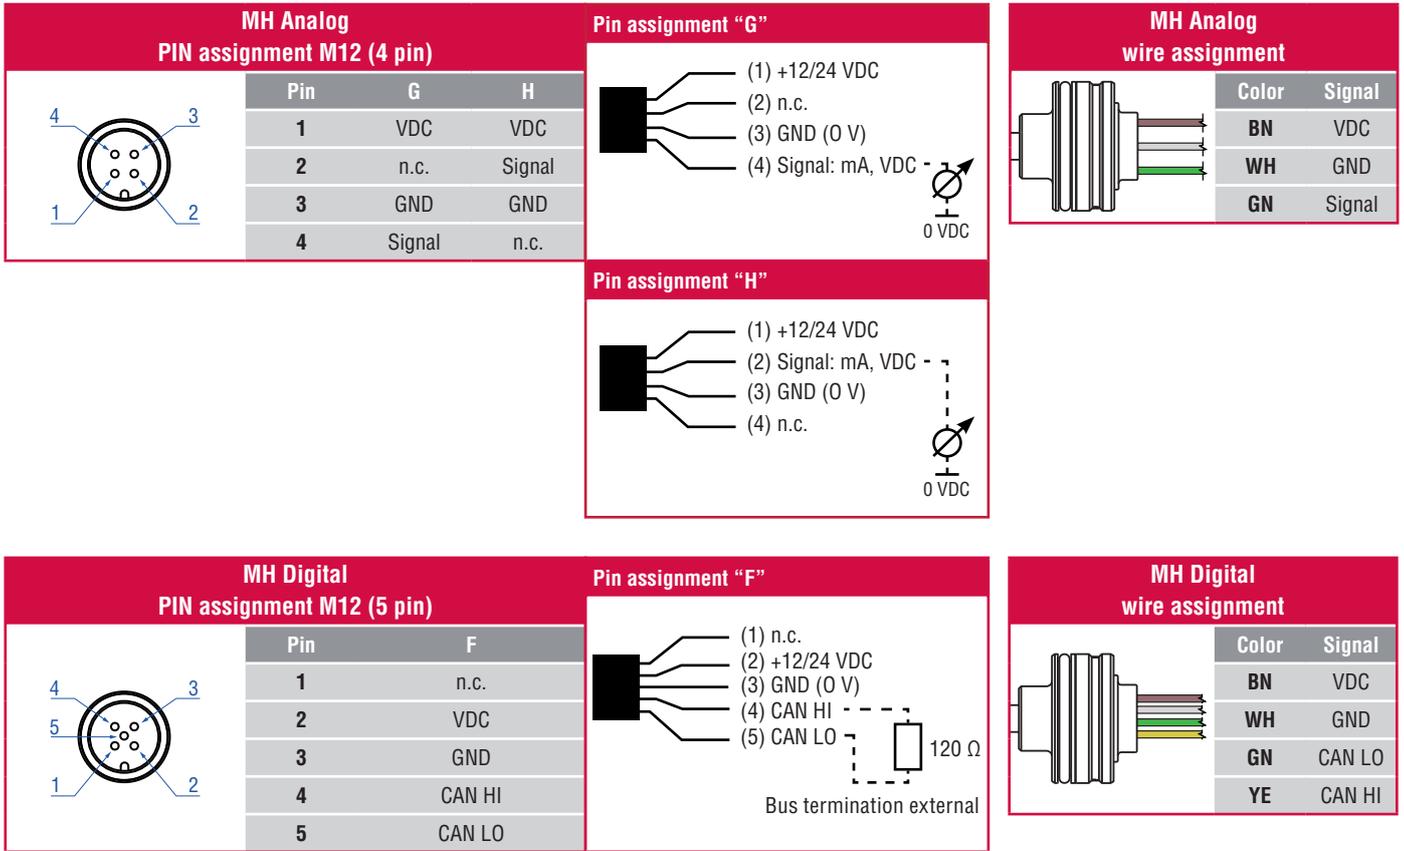

 Please pay attention to installation manual!

### Connecting schematics on vehicle electronics:

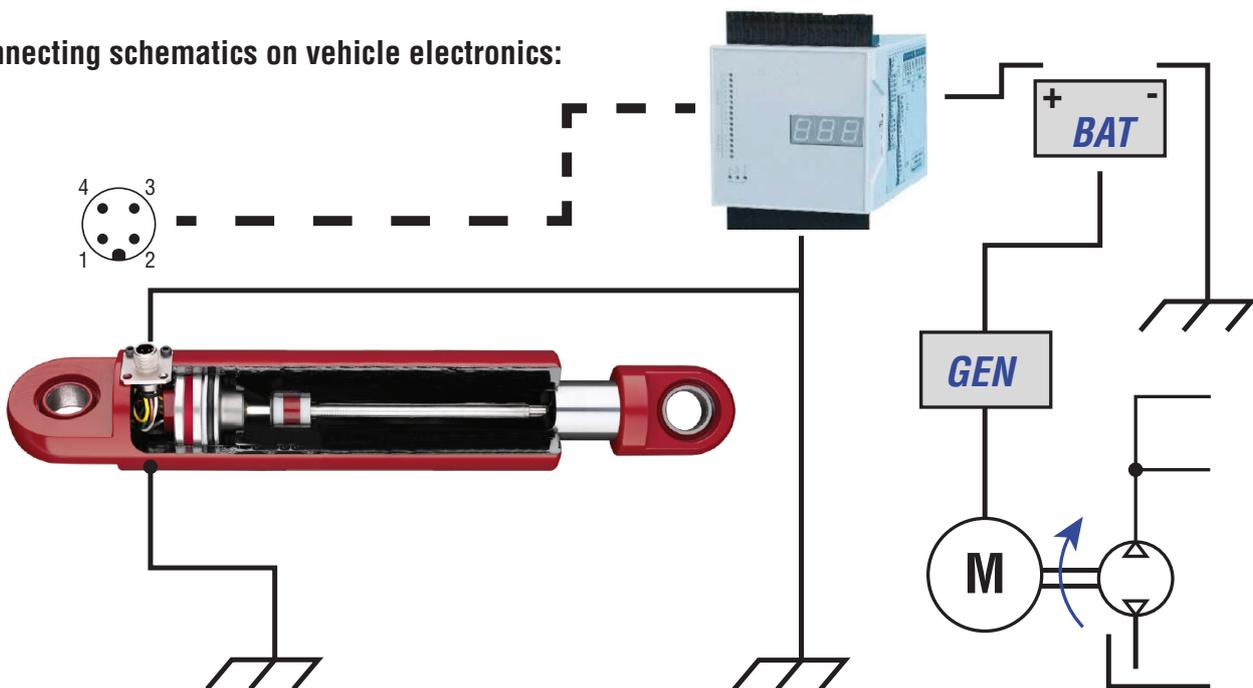

All dimensions in mm

## 6. MH Analog: Technical data

Input		
Measured value	Position	
Stroke range	2520...5000 mm (in 20 mm steps)	
Output		
Signal characteristic	Analog output restricted by noise or A/D converter of control unit	
Voltage	0.5...9.5 VDC	
Current	4...20 mA	
Resolution	2520...3500 mm ≤ 0.5 mm	3520...5000 mm ≤ 1.0 mm
Power up time	Typ. 250 ms	
Mounting zone	30 mm	
Damping	63.5 mm 69.5 mm (M6 female) / 85.5 mm (M8 male)	
Accuracy		
Linearity	2520...3500 mm ≤ ±1.0 mm	
	3520...5000 mm ≤ ±2.0 mm	
Hysteresis	2520...3500 mm ≤ ±0.5 mm	
	3520...5000 mm ≤ ±1.0 mm	
Internal sample rate	2 ms	
Setpoint tolerance	≤ 2 mm	
Operating conditions		
Mounting position	Any	
Operating temperature electronics	-40...+105 °C	
Storage temperature	-25...+ 65 °C	
Fluid temperature	-30...+ 85 °C	
Dew point, humidity	EN60068-2-30, 90 % rel. humidity, no condensation	
Pressure <b>Without considering support tube assembly</b>		
Operating pressure ratings	Pressure impulse test according DIN EN ISO 19879	
Nominal operating pressure (P <sub>N</sub> )	320 bar	
Max. overload pressure in cylinder (P <sub>MAX</sub> )	400 bar	
Max. static proof pressure in cylinder (P <sub>PROOF</sub> )	550 bar	
IP rating		
M12 connector	EN60529 (IP69K) when plugged	
Sensor housing	EN60529 (IP67)	
Environmental testing		
Shock test	IEC 60068-2-27, 50 g (11 ms) single shock, 15 g (11 ms) at 1000 shocks per axis	
Vibration test	IEC 60068-2-64, 5 g (r.m.s.) Ø 10 mm pressure pipe (10...2000 Hz) – resonance frequencies excluded	
EMC test & evaluation	ISO 14982 Agricultural and forest machines	
	EN 13309 Construction machines	
	Immunity:	ISO 11452-2 (200 V/m Antenna), ISO 11452-4 (200 mA BCI)
	Emissions:	CISPR 25
	Transiente Impulses:	ISO 7637-2
E.S.D.:	ISO/TR 10605	
Materials and dimensions		
Pressure pipe (Ø 10 mm)	Stainless steel 1.4306 / AISI 304L	
Housing	Stainless steel 1.4305 / AISI 303	
Sealing	O-ring 40.87 × 3.53 mm NBR 80, back-up ring 42.6 × 48 × 1.4 PTFE	
M12 connector insert	Material: polyamide reinforces; O-ring 7 × 1.35 mm NBR 70; pins: brass with gold plated pins	
M12 flange	Brass nickel-plated with O-ring 13 × 1.6 NBR 70	
Electrical installation		
Connector	M12 male plug or cable assembly	
Supply voltage	<b>12 VDC (tolerance range 8...32 VDC)</b>	<b>24 VDC (tolerance range 8...32 VDC)</b>
Current consumption	Typ. ≤ 100 mA	Typ. ≤ 50 mA
Load (output VDC)	R <sub>L</sub> ≥ 10 kΩ	R <sub>L</sub> ≥ 10 kΩ
Load current (output VDC)	Typ. 1 mA	Typ. 1 mA
Loud (output mA)	R <sub>L</sub> ≤ 250 Ω	R <sub>L</sub> ≤ 500 Ω
Inrush current	Max. 2.5 A/2 ms	Max. 4.5 A/2 ms
Supply voltage ripple	< 1 % p-p	
Power drain	< 1 W	
Over voltage protection (GND-VDC)	Up to +36 VDC	
Polarity protection (GND-VDC)	Up to -36 VDC	
Insulation Resistance	R ≥ 10 MΩ @ 60 sec	
Electric strength	500 VDC (DC GND to chassis GND)	

## 6.1 Model configurator

<b>M</b>	<b>H</b>							<b>3</b>		
<b>a</b>	<b>b</b>	<b>c</b>			<b>d</b>		<b>e</b>	<b>f</b>		
<b>a Sensor model</b>										
<b>M</b>	<b>H</b>	Flange housing Ø 48 mm								
<b>b Form factor</b>										
<b>C</b>	Pressure pipe Ø 10 mm, Damping: 63.5 mm									
<b>L</b>	Pressure pipe Ø 10 mm, Damping: 69.5 mm, M6 female									
<b>Q</b>	Pressure pipe Ø 10 mm, Damping: 85.5 mm, M8 male port									
<b>c Stroke range (mm)</b>										
				2520...5000 mm (in 20 mm steps)						
<b>d Electrical wiring</b>										
<b>M12 connector (VDC – GND – SIGN) incl. M12 flange</b>										
<b>N</b>			<b>G</b>	4 pin (1-3-4), 60...240 mm cable length (in 20 mm steps)				<i>Examples cable length</i>		
								<i>N08G = 080 mm</i>		
<b>N</b>			<b>H</b>	4 pin (1-3-2), 60...240 mm cable length (in 20 mm steps)				<i>Example cable length</i>		
								<i>N10H = 100 mm</i>		
<b>Cable assembly</b>										
<b>T</b>			<b>A</b>	300...9000 mm cable length (in 100 mm steps)				<i>Example cable length</i>		
								<i>T10A = 1000 mm</i>		
<b>e Supply voltage</b>										
<b>3</b>	+12/24 VDC									
<b>f Output</b>										
<b>V</b>	<b>0</b>	<b>2</b>	0.5...9.5 VDC							
<b>A</b>	<b>0</b>	<b>1</b>	4...20 mA							

### Scope of delivery:

Position sensor, O-ring, backup-ring and M12 connector system

**Please order accessories separately!**

**Adapters, support tube, locknuts, spacers etc. are not part of Temposonics shipment. Please consult Temposonics for engineering support**

## 7. MH Digital: Technical data

Input	
Measured value	Position and velocity
Stroke range	2520...5000 mm (in 20 mm steps)
Velocity range	0...1000 mm/s
Output	
Signal characteristic	Bus-protocol: SAE J1939, CANopen protocol according to CiA DS-301 V4.1, device profile DS-406 V3.1
Resolution (position)	0.5 mm
Resolution (velocity)	1 mm/s
Boot up time	Typ. 400 ms
Cycle time	CANopen: 2 ms SAE J1939: 20 ms
Mounting zone	30 mm
Damping	63.5 mm 69.5 mm (M6 female) / 85.5 mm (M8 male)
Accuracy	
Linearity	2520...3500 mm $\leq \pm 1.0$ mm 3520...5000 mm $\leq \pm 2.0$ mm
Hysteresis	$\pm 0.5$ mm
Internal sample rate	2 ms
Setpoint tolerance	$\pm 0.2$ mm
Operating conditions	
Mounting position	Any
Operating temperature electronics	-40...+105 °C
Storage temperature	-25...+ 65 °C
Fluid temperature	-30...+ 85 °C
Dew point, humidity	EN60068-2-30, 90 % rel. humidity, no condensation
Pressure <b>Without considering support tube assembly</b>	
Operating pressure ratings	Pressure impulse test according to DIN EN ISO 19879
Nominal operating pressure (P <sub>N</sub> )	320 bar
Max. overload pressure in cylinder (P <sub>MAX</sub> )	400 bar
Max. static proof pressure in cylinder (P <sub>PROOF</sub> )	550 bar
IP rating	
M12 connector	EN60529 (IP69K) when plugged
Sensor housing	EN60529 (IP67)
Environmental testing	
Shock test	IEC 60068-2-27, 50 g (11 ms) single shock, 15 g (11 ms) at 1000 shocks per axis
Vibration test	IEC 60068-2-64, 5 g (r.m.s.) Ø 10 mm pressure pipe (10...2000 Hz) – resonance frequencies excluded
EMC test	ISO 14982 Agricultural and forest machines
test & evaluation	EN 13309 Construction machines Immunity: ISO 11452-2 (200 V/m Antenna), ISO 11452-4 (200 mA BCI) Emissions: CISPR 25 Transiente Impulses: ISO 7637-2 E.S.D.: ISO/TR 10605
Materials and dimensions	
Pressure pipe (Ø 10 mm)	Stainless steel 1.4306 / AISI 304L
Housing	Stainless steel 1.4305/AISI 303
Sealing	O-ring: 40.87 × 3.53 mm NBR 80; back-up ring: 42.6 × 48 × 1.4 PTFE
M12 connector insert	Material: polyamide reinforces; O-ring 7 × 1.35 mm NBR 70; pins: brass with gold plated pins
M12 flange	Brass nickel-plated with O-ring 13 × 1.6 NBR 70
Electrical installation	
Connector	M12 male plug or cable assembly
Supply voltage	<b>12 VDC (8...32 VDC)</b>   <b>24 VDC (8...32 VDC)</b>
Current consumption	Typ. $\leq 100$ mA   Typ. $\leq 50$ mA
Inrush current	Max. 1.0 A @ 2 ms   Max. 1.5 A @ 2 ms
Supply voltage ripple	$< 1$ % p-p
Power drain	$< 1.5$ W
Over voltage protection (GND-VDC)	Up to +36 VDC
Polarity protection (GND-VDC)	Up to -36 VDC
Insulation Resistance	$R \geq 10$ MΩ @ 60 sec.
Electric strength	500 VDC (DC GND to chassis GND)



## Accessories


### Position magnets for installation without support tube

		
<b>OD17.4 Ring magnet</b> Part no. 401 032	<b>OD25.4 Ring magnet</b> Part no. 400 533	<b>OD33 Ring magnet</b> Part no. 201 542-2
Material: PA-Neobind Weight: ca. 5 g Operating temperature: -40...+100 °C Surface pressure: max. 20 N/mm <sup>2</sup>	Material: PA-Ferrit Weight: ca. 10 g Operating temperature: -40...+100 °C Surface pressure: max. 40 N/mm <sup>2</sup>	Material: PA-Ferrit-GF20 Weight: ca. 14 g Operating temperature: -40...+100 °C Surface pressure: max. 40 N/mm <sup>2</sup> Fastening torque for M4 screw: max. 1 Nm

### Position magnets for installation with support tube

	
<b>Ring magnet</b> Part no. 402 316	<b>Ring magnet</b> Part no. 403 974
Material: PA ferrite coated Weight: ca. 13 g Operating temperature: -40...+100 °C Surface pressure: 20 N/mm <sup>2</sup>	Material: NdFeB Weight: ca. 20 g Operating temperature: -40...+100 °C Surface pressure: 20 N/mm <sup>2</sup>

### M12 Flange Testkits

			
<b>M12 Flange (spare part)</b> Part no. 253 769	<b>Testkit Analog</b> Part no. 280 618	<b>Testkit Digital</b> Part no. 254 267	<b>Testssoftware Digital</b> Part no. 625 129
	<ul style="list-style-type: none"> <li>MH-Series analog / PWM Tester</li> <li>12 VDC battery charger with adapter (adapter main plug EU, adapter main plug UK)</li> <li>cable with M12 connector</li> <li>cable with pigtailed wires</li> <li>carrying case</li> </ul>	<ul style="list-style-type: none"> <li>USB CAN-Modul Kit: <ul style="list-style-type: none"> <li>USB CAN-Modul</li> <li>USB CAN-Modul Utility CD (driver &amp; manual)</li> </ul> </li> <li>USB cable</li> <li>cable with Temposonics M12 connector and RS232 connector</li> <li>cable with RS232 connector</li> <li>carrying case</li> <li>12 VDC power supply</li> </ul>	Software for MH Digital

**Order information:**  
For complete package please  
order both part numbers.

**UNITED STATES**  
**Temposonics, LLC**  
Americas & APAC Region  
3001 Sheldon Drive  
Cary, N.C. 27513  
Phone: +1 919 677-0100  
E-mail: [info.us@temposonics.com](mailto:info.us@temposonics.com)

---

**GERMANY**  
**Temposonics**  
**GmbH & Co. KG**  
EMEA Region & India  
Auf dem Schüffel 9  
58513 Lüdenscheid  
Phone: +49 2351 9587-0  
E-mail: [info.de@temposonics.com](mailto:info.de@temposonics.com)

---

**ITALY**  
Branch Office  
Phone: +39 030 988 3819  
E-mail: [info.it@temposonics.com](mailto:info.it@temposonics.com)

---

**FRANCE**  
Branch Office  
Phone: +33 6 14 060 728  
E-mail: [info.fr@temposonics.com](mailto:info.fr@temposonics.com)

---

**UK**  
Branch Office  
Phone: +44 79 21 83 05 86  
E-mail: [info.uk@temposonics.com](mailto:info.uk@temposonics.com)

---

**SCANDINAVIA**  
Branch Office  
Phone: +46 70 29 91 281  
E-mail: [info.sca@temposonics.com](mailto:info.sca@temposonics.com)

---

**CHINA**  
Branch Office  
Phone: +86 21 3405 7850  
E-mail: [info.cn@temposonics.com](mailto:info.cn@temposonics.com)

---

**JAPAN**  
Branch Office  
Phone: +81 3 6416 1063  
E-mail: [info.jp@temposonics.com](mailto:info.jp@temposonics.com)

---

**Document Part Number:**  
551405 Revision E (EN) 02/2026



**temposonics.com**